



Power Angle Broom

The Power Angle Broom is designed for heavy-duty sweeping of dirt, snow, and other unwanted material. It quickly mounts to your skid steer or tractor loader. Featuring a 68", 84" or 96" width, optional hydraulic angle change, and the exclusive Floating Torsion Suspension System™.



The exclusive E-Z Sweep Floating Torsion Suspension System™ assists the operator in keeping consistent and correct bristle down-pressure, reducing excessive wear on the bristles.

FEATURES

- Easy operation
- Exclusive Torsion Float Suspension
- Fast wafer change time
- Manual 25° right and left angle
- Optional hydraulic angling 25° right and left angle
- Greasable bearings for longer wear life
- Hydraulic drive motor (no chains) mounted in brush arbor
- Loader arms raise and lower broom
- Large 32" heavy-duty wafer packages available



"A Legacy of Excellence Since 1948"

www.erskineattachments.com

SKID STEER



SPECIFICATIONS / OPTIONS

Model	680 / 680X / 680XL	840 / 840X / 840XL	960 / 960X / 960XL
Width	68"	84"	96"
Width Fully Angled	63" @ 25°	77" @ 25°	89" @ 25°
Broom Angling	Manual 25°	Manual 25°	Manual 25°
Drive System	Hydraulic Motor Direct Drive	Hydraulic Motor Direct Drive	Hydraulic Motor Direct Drive
Flow Range	13-24 GPM	13-24 GPM	10-20 GPM
Wafer Diameter	32"	32"	32"
Wafer Sections (number)	33 zig-zag, 2 straight	40 zig-zag, 2 straight	48 zig-zag, 2 straight
Mounting Plate	Universal	Universal	Universal
Shipping Weight	790 lb.	850 lb.	910 lb.
Operating Weight	715 lb.	775 lb.	835 lb.

Options

Pistol Grip Control Harness


Loader Specific Wire Harness*

Factory Installed Couplers

Model	Model	Model
680 Manual w/poly	840 Manual w/poly	960 Manual w/poly
680 Manual w/steel	840 Manual w/steel	960 Manual w/steel
680 Manual w/poly/steel	840 Manual w/poly/steel	960 Manual w/poly/steel
680X Hyd. w/poly	840X Hyd. w/poly	960X Hyd. w/poly
680X Hyd. w/steel	840X Hyd. w/steel	960X Hyd. w/steel
680X Hyd. w/poly/steel	840X Hyd. w/poly/steel	960X Hyd. w/poly/steel
680XL Hyd. Rev. w/poly	840XL Hyd. Rev. w/poly	960XL Hyd. Rev. w/poly
680XL Hyd. Rev. w/steel	840XL Hyd. Rev. w/steel	960XL Hyd. Rev. w/steel
680XL Hyd. Rev. w/poly/steel	840XL Hyd. Rev. w/poly/steel	960XL Hyd. Rev. w/poly/steel

* Applies to Hydraulic Models Only

Easily assembled
greasable bearings for
extended wear life

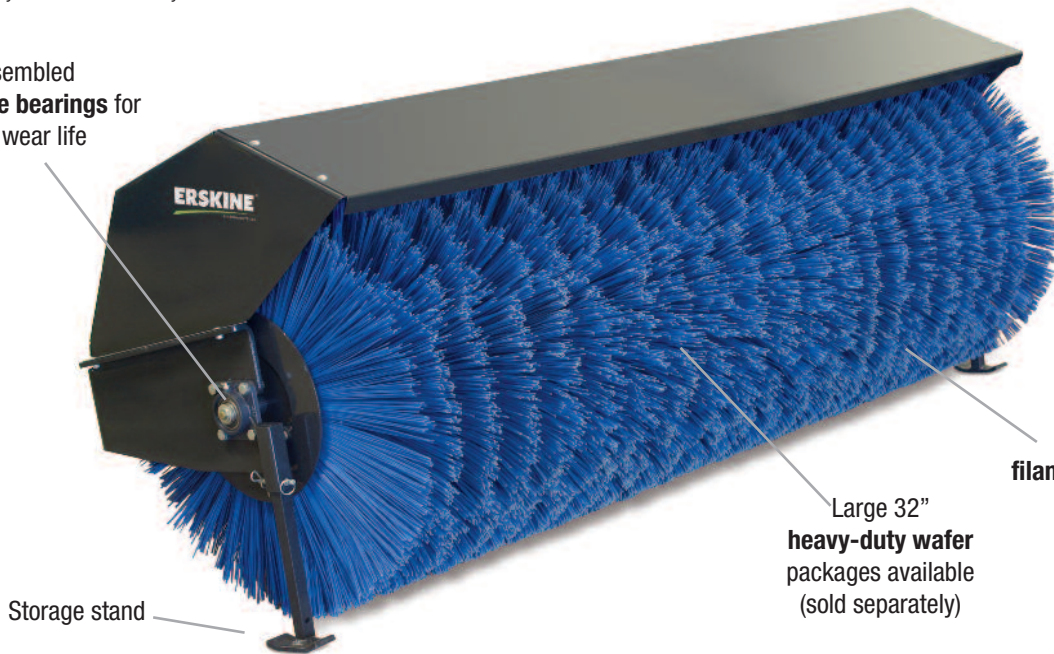

Storage stand

More and larger
filament than most of
our competitors

Large 32"
heavy-duty wafer
packages available
(sold separately)



Optional:
Wire harness for hydraulic models
with attachment controls. Fits
Cat/ASV (8-pin) and John
Deere/New Holland/CASE/
Bobcat (14-pin)



Optional:
Pistol Grip Control Harness
is required if skid steer is
NOT equipped with
attachment control system.
(Only needed when ordering
hydraulic angling model).

FAT•N | Char-Lynn

ERSKINE
ATTACHMENTS LLC

Prices, financing and specifications subject to change without notice.

“For the Lord takes delight in his people; he crowns the humble with victory.” – Psalm 149:4