

Model

260MRT

MINI ROUGH TERRAIN SCISSOR LIFT

Features

- 65 x 102 in. (1.65 x 2.59 m) Steel Platform
- 4 ft (1.22 m) Manual Roll-Out Deck Extension
- Fold-Down Platform Rails
- Moveable, Removable Platform Control Box
- Cross Corner Four-wheel Drive
- Proportional Hydrostatic Drive Control with Thumb Steer
- Proportional Lift Up
- 110V-AC Receptacle in Platform Horn
- Horn
- Hourmeter
- 3 Degree Slope Alarm and Light
- Lubrication-Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Manual Descent Pull Cable
- Heavy Gauge Steel Chassis Hoods
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- 26 x 12 in. Lug Tread Tires
- All Motion Alarm

Accessories & Options

- 26 x 12 Foam Filled Tires
- Platform Work Lights
- Full Swing-Gate
- 110V-AC Generator
- Flashing Beacon
- 33.5 lb (19.73 kg) Propane Tank
- Hydraulic Leveling Jacks



Exceptional mobility on or off slab

- Narrow 69-inch chassis fits into tight spaces
- Standard cross corner four-wheel drive with 35% gradeability




Larger work platform, high capacity

- Large 65 x 102 in. deck space with 4-foot roll-out deck extension
- 1,250-pound platform capacity and up to 300 lb on the platform extension

Service and reliability

- Simplified ground control wiring for ease of service
- Automatic transmission control and full diagnostics

Specifications

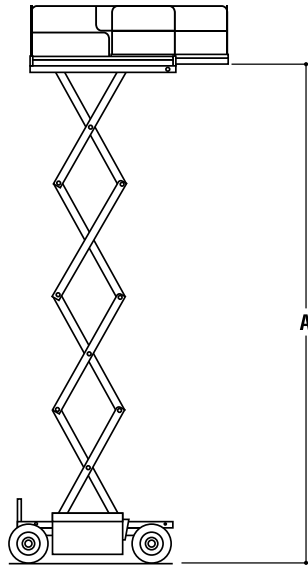

Dimensions

| | |
|--------------------------------------|------------------------------|
| A. Platform Height Elevated | 26 ft (7.92 m) |
| B. Platform Height Lowered | 4 ft 1.5 in. (1.26 m) |
| C. Platform Railing Height | 3 ft 7.5 in. (1.1 m) |
| D. Overall Height | 7 ft 9.5 in. (2.37 m) |
| E. Platform Size | 65 x 102 in. (1.65 x 2.59 m) |
| F. Platform Extension | 4 ft (1.22 m) |
| G. Overall Width | 5 ft 9 in. (1.75 m) |
| H. Overall Length (no outriggers) | 8 ft 9 in. (2.67 m) |
| I. Wheelbase | 6 ft 6 in. (1.98 m) |
| J. Ground Clearance | 8 in. (20 cm) |
| Platform Capacity | 1,250 lb (567 kg) |
| Capacity on Deck Extension | 300 lb (136 kg) |
| Lift/Lower Speed | 27/21 sec. |
| Maximum Drive Height | Full Height |
| Gross Vehicle Weight | 7,360 lb (3,338 kg) |

Chassis

| | |
|-------------------------|---------------------------------------|
| Drive Speed-Lowered | 3.5 mph (5.6 kmph) |
| Drive Speed-Elevated | 0.4 mph (0.6 kmph) |
| Gradeability | 35% |
| Turning Radius (inside) | 84 in. (2.13 m) |
| Tire Size/Type | 26 x 12 Lug Tread |
| Brakes | Spring Applied Hydraulically Released |

Power system

| | |
|---------------------|--------------------------|
| Dual Fuel Engine | Kubota 24.5 hp (18.3 kW) |
| Diesel Engine | Kubota 22.5 hp (16.8 kW) |
| Fuel Tank Capacity | 7.5 gal. (28.39 L) |
| Hydraulic Reservoir | 15 gal. (56.78 L) |



Standard Cross Corner Four-Wheel Drive for Terrainability



Strengthened Arm Stack for Improved Stack Rigidity

The JLG "1 & 5" Warranty

JLG Industries, Inc. backs our products with our exclusive "1 & 5" Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) full years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453 and ANSI A92.6-2006 as originally manufactured for intended applications.



JLG Industries, Inc.

1 JLG Drive
McConnellsburg, PA 17233-9533
Telephone 717-485-5161
Toll-free in US 877-JLG-LIFT
Fax 717-485-6417

www.jlg.com

An Oshkosh Corporation Company