


AM Series

PERSONNEL LIFTS



**15AM, 20AM
25AM, 30AM
36AM, 41AM**

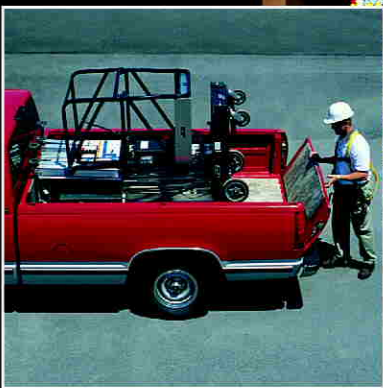

JLG



Designed For Value and Performance

JLG takes the personnel lift industry to new heights with the AM Series push-around personnel lifts. You'll enjoy greater productivity with the highest capacities in the industry and the ability to get closer to your work area. Plus, with a mast guide system that requires no lubrication, a new family of quick-change platforms, a unique power management system and the convenience of the 15AMI outriggerless lift — the AM Series lifts provide a whole new level of value and performance.

A Broad Family Offering for Improved Productivity

JLG's AM Series personnel lifts are available in six different models, with platform heights ranging from 15 to 41 feet (4.60 to 12.40 m). The AM Series lifts are ideal for a broad range of worksite requirements — from industrial and maintenance applications, to entertainment and institutional usage.



Stronger Anodized Mast

Every AM Series lift features an anodized mast that is more rigid for less deflection and sway. The mast guide system requires no lubrication for the life of the machine.



Improved Maneuverability and Transport

JLG's six-wheel design gives the AM Series enhanced maneuverability, while the 10 in. (25 cm) wheels provide ease of movement. Models with heights up to 30 ft. (9.14 m) roll through standard doorways and into elevators without tilt back, and have an overall length of 47 in. (1.19 m) for transport in cargo vans or small elevators. All AM models have six-inch-wide (15 cm) fork pockets that allow for convenient loading, and can be loaded on standard size pickup trucks. Plus, new mid-ship tie down points are easier to reach and provide improved protection from chain damage.



Quick-Change Platforms

JLG now offers a family of quick-change platforms that can be changed in less than one minute without tools, to suit your specific application needs. Choose from our standard slide rail side entry platform measuring 25.5 x 26 in. (65 x 66 cm), an optional oversized gull-wing entry platform measuring 26 x 28 in. (66 x 71 cm), an optional narrow gull-wing entry platform measuring 24.5 x 22 in. (62 x 56 cm), or an optional step-in molded swing-up entry platform measuring 26 x 26 in. (66 x 66 cm). Also available for the Model 15AMI only is an optional gull-wing front entry extension platform measuring 26 x 26 in. retracted; 49 x 26 in. extended. All rail heights are 43-1/4 in. (1.09 m).



DC Model Power Management System

The AM Series DC Model lifts' battery mount provides ease of access to the battery and includes a constant display battery discharge indicator (BDI) of the charge status of the battery. JLG's automatic battery charger takes the guesswork out of the charging times, and protects from overcharging and possible battery damage. Plus, with our unique automatic power-off system, you'll be able to avoid unnecessary battery drain and achieve optimum battery life.



FEATURES AND SPECIFICATIONS

Standard Features

Low Maintenance Anodized Mast
 110 Volt Double Receptacle on Platform
 Auto Power Saver — Shuts Off Power when Idle
 Battery Discharge Indicator (BDI)
 Lanyard Attachment Anchor for Fall Protection Systems
 Non-Marking Tires
 Quick-Change Platform Mounts
 Quick-Change 25.5 x 26 in. (65 x 66 cm) Slide Rail Side or Front Entry Platform
 Automatic Battery Charger
 Roller Loading Device for Loading on Standard Size Pickup Trucks — AM Models Only
 Tilt Back, on 36AM & 41AM only
 JLG “1 & 5” Warranty

Available Options

Oversized Quick-Change 26 x 28 in. (66 x 71 cm) Gull-Wing Front Entry Platform
 Narrow Quick-Change 24.5 x 22 in. (62 x 56 cm) Gull-Wing Front Entry Platform
 Molded Quick-Change 26 x 26 in. (66 x 66 cm) Swing-Up Gate Side Entry Platform
 Material Tray: 26" W x 26" L x 5" D (15AMI with Molded Platform Only)
 Extension Quick-Change Platform (15AMI only) 26 x 26 in. Retracted; 49 x 26 in. Extended, Gull-Wing Front Entry
 Straddle Kit — AM Models Only
 Straddle Ladder for Straddle Kit
 Straddle Outrigger Interlock Adapter
 18 x 8 in. Tool Tray — 5 in. Deep
 Fluorescent Light Tube Caddy
 Crane Hook — Lifting Eye for a Crane Hook
 Auxiliary Emergency Lowering Control
 Laser Locator (Light Beam for Lift Positioning)
 Extra Power Pack
 Descent Alarm
 Flashing Amber Beacon
 Model 15AMI Clean Room Option
 High Performance Sealed Battery and 5 hr. Charger

Cord Retractor for Charging and AC to the Platform

	15AMI	20AM	25AM	30AM	36AM	41AM
Working Height	21 ft. (6.40 m)	26 ft. (7.92 m)	31 ft. (9.45 m)	36 ft. (11.0 m)	42 ft. (12.80 m)	47 ft. (14.33 m)
Platform Height	15 ft. (4.57 m)	20 ft. 5 in. (6.09 m)	25 ft. 2 in. (7.62 m)	29 ft. 10 in. (9.14 m)	36 ft. 3 in. (11.05 m)	40 ft. 9 in. (12.42 m)
Platform Capacity	350 lbs. (160 kg)	350 lbs. (160 kg)	350 lbs. (160 kg)	350 lbs. (160 kg)	300 lbs. (135 kg)	300 lbs. (135 kg)
Overall Height – Stowed	77.5 in. (2.0 m)	77.5 in. (2.0 m)	77.5 in. (2.0 m)	77.5 in. (2.0 m)	104 in. (2.64 m)	104 in. (2.64 m)
Overall Base Width – Stowed	29 in. (74 cm)	29 in. (74 cm)	29 in. (74 cm)	29 in. (74 cm)	29 in. (74 cm)	29 in. (74 cm)
Overall Length – Stowed	52.5 in. (1.33 m)	47 in. (1.19 m)	49 in. (1.24 m)	52 in. (1.32 m)	54.5 in. (1.38 m)	57.5 in. (1.46 m)
Overall Length – Without Platform	52.5 in. (1.33 m)	47 in. (1.19 m)	47 in. (1.19 m)	47 in. (1.19 m)	53 in. (1.35 m)	53 in. (1.35 m)
Overall Height – Tilted Back	n/a	n/a	n/a	n/a	75.5 in. (1.92 m)	77 in. (1.96 m)
Overall Length – Tilted Back	n/a	n/a	n/a	n/a	108 in. (2.74 m)	108 in. (2.74 m)
Ground Entry Height	19 in. (48 cm)	19 in. (48 cm)	19 in. (48 cm)	19 in. (48 cm)	19 in. (48 cm)	19 in. (48 cm)
Outrigger Footprint Length	n/a	62 in. (1.57 m)	62 in. (1.57 m)	68 in. (1.73 m)	79 in. (2.01 m)	79 in. (2.01 m)
Outrigger Footprint Length – CSA	n/a	79 in. (2.01 m)	79 in. (2.01 m)	93 in. (2.36 m)	108 in. (2.74 m)	108 in. (2.74 m)
Outrigger Footprint Width	n/a	53 in. (1.35 m)	53 in. (1.35 m)	61 in. (1.55 m)	79 in. (2.01 m)	79 in. (2.01 m)
Outrigger Footprint Width – CSA	n/a	79 in. (2.01 m)	79 in. (2.01 m)	98 in. (2.36 m)	119 in. (3.02 m)	119 in. (3.02 m)
Distance to Wall – Front	0 in.	8 in. (20 cm)	5 in. (13 cm)	5 in. (13 cm)	14 in. (35 cm)	11 in. (28 cm)
Distance to Wall – Front – CSA	n/a	17 in. (43 cm)	14 in. (36 cm)	18 in. (46 cm)	28 in. (71 cm)	26 in. (66 cm)
Distance to Wall – Side	1.5 in. (4 cm)	13 in. (33 cm)	13 in. (33 cm)	18 in. (46 cm)	26 in. (66 cm)	26 in. (66 cm)
Distance to Wall – Side – CSA	n/a	26 in. (66 cm)	26 in. (66 cm)	37 in. (94 cm)	46 in. (117 cm)	46 in. (117 cm)
Gross Vehicle Weight – AC	820 lbs. (373 kg)	740 lbs. (336 kg)	825 lbs. (374 kg)	890 lbs. (404 kg)	1060 lbs. (481 kg*)	1100 lbs. (499 kg [†])
Gross Vehicle Weight – DC	910 lbs. (414 kg)	860 lbs. (390 kg)	905 lbs. (410 kg)	940 lbs. (426 kg)	1160 lbs. (526 kg**)	1230 lbs. (558 kg ^{††})

* for CSA add 170 lbs. (77 kg); ** for CSA add 125 lbs. (57 kg); † for CSA add 215 lbs. (98 kg); †† for CSA add 145 lbs. (66 kg)

The JLG “1 & 5” Warranty

JLG Industries, Inc. backs our products with our exclusive “1 & 5” Warranty. We provide coverage on all products for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable OSHA Regulations in 29 CFR 1910.67, 29 CFR 1926.453, ANSI A92.3-1990, as originally manufactured for intended applications.

Printed in USA
 FORM NO.: SS-AM-698-20M
 PART NO.: 3132106
 R06013

JLG Industries, Inc.

1 JLG Drive
 McConnellsburg, PA 17233-9533
 Telephone 717-485-5161
 Fax 717-485-6417
 www.jlg.com

